




Standard 19.05mm Weldon Shank suitable for all magnet drills




Metal guard system available. Order separately.

RSP
£ 649



Technical Specifications

CUTTER SIZE RANGE	12-40mm
TWIST DRILL RANGE	5-12mm
COUNTERSINKING	30mm
LENGTH	400mm
WIDTH	120/145mm
HEIGHT	200mm
STROKE	50mm
WEIGHT	13kg
MAGNET SIZE (L x W)	100x215mm
MAGNETIC FORCE	780kg
MOTOR POWER	1300 W
SPEED/s (RPM)	320 RPM
ARBOR	19.05mm (3/4") Weldon
TAKES CHUCK	No
COOLANT SYSTEM	Removable

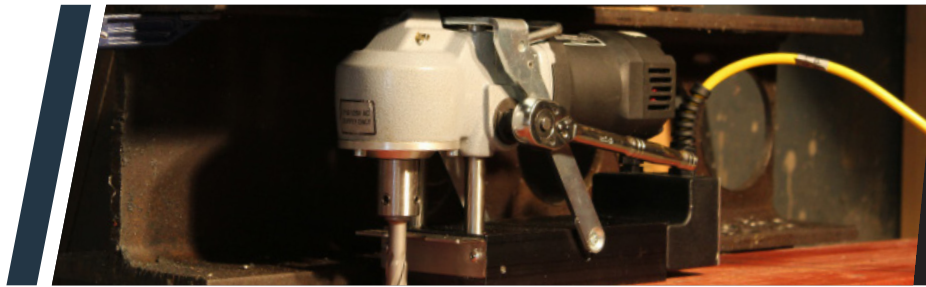

The new HMT RTA40 is a low profile Magnet drill for tight access applications, being designed to fit into any space greater than 200mm. Suitable for use with any standard broaching cutters while optimised to work with the high-performance CarbideMax 40 cutters.

- Ratchet drive can be mounted on either side of the machine.
- Powerful motor and magnet gives excellent stability.

Each machine comes in a plastic case with hex keys, safety strap, ratchet, and removable coolant system

Part No	Contents	Volt	List Price
803086-0001	HMT RTA40 Magnet Drill Kit	110v	£829.00
803086-0002	HMT RTA40 Magnet Drill Kit	230v	£829.00

IDEAL FOR TIGHT ACCESS APPLICATIONS
ROBUST DESIGN, SUITABLE FOR SITEWORK